


EMI filter for power electronics and converters

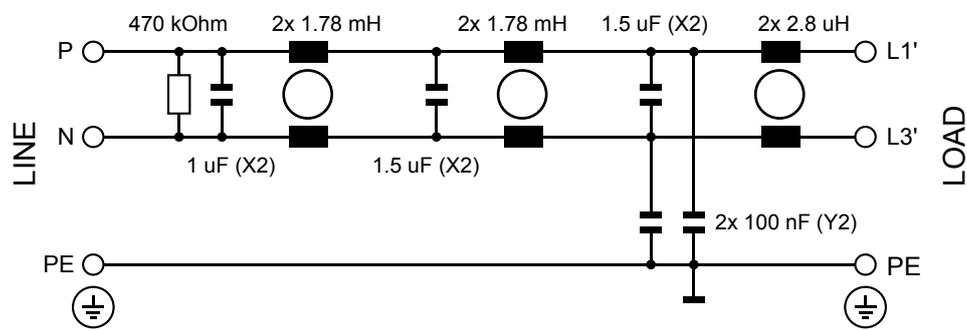

Tolerances L: +50 % C: +20 % R: +10 %
 -30 % -20 % -10 %

Designation:	FS41756-8-07
Part Number:	821119
Customer's Designation:	R88A-FI1SA108-SE

Document Number:	1017734	A
Created:	LUTSNO	2019-08-26
Checked:	LUTLUR	2019-08-26
Released:	LUTLUR	2019-08-26


Revision History

A	2019-08-26	LUTLUR	initial version
---	------------	--------	-----------------

Electrical

Rated Current (I_{th}):	8 A	@ 55 °C amb. Temperature
Nominal Operating Voltage:	230 VAC	
Rated Operating Voltage:	250 VAC	
Max. Operating Frequency:	60 Hz	
Leakage Current (IEC60939-3):	7.9 mA	@ Rated Voltage and 50 Hz
Leakage Current max.:	15.6mA @ 250VAC and 50Hz	(1 phase open circuit)
Production Line Test Voltage:	2.25 kVDC*	for 2 s (P/N to E)
	1.1 kVDC*	for 2 s (P to N)
(* Repetition with max. 80 % of the specified values)		
Overvoltage Category (IEC60664-1):	II	
Max. DC Resistance @ 25 °C:	28 mOhm	P - P

Current Derating

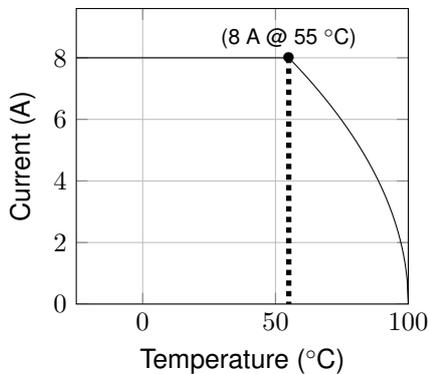

$$I = I_N \cdot \sqrt{\frac{\Theta_{max} - \Theta_{act}}{\Theta_{max} - \Theta_N}}$$

for $\Theta_{act} > \Theta_N$ and $\Theta_{act} < \Theta_{max}$

I_N rated current at Θ_N
 Θ_{act} actual ambient temperature
 Θ_N temperature at which the rated current is defined
 Θ_{max} rated maximum temperature of the component

Environmental & Reliability

Operating Ambient Temp. Range:	-25 °C to 100 °C
	Current is subjected to derating for temperatures above the rated current temperature point
Storage Temp. Range:	-20 °C to 65 °C
Cooling:	AN
Pollution Degree (IEC60664-1):	2
Climatic Class (IEC60068-1):	25/100/21
Flammability Class:	UL-94V-2

Standards, Certifications and Compliances

Design Standard	Certification
IEC 60939-3	Based on

Product Compliances

Low voltage directive 2014/35/EU

Material Compliances

RoHS 2011/65/EU, 2015/863/EU

REACH No. 1907/2006

Mechanical

Line:	(-29) SFC 4	Type:	Safety terminal block
		Torque (Nm):	0.7-0.8
		Flex Wire (AWG):	24-10
		Solid Wire (mm ²):	0.25-6
		Flex Wire (mm ²):	0.25-4
Load:	(-07) Lace	Type:	See Mechanical Drawing
PE:	Thread M4	Torque (Nm):	1.5-1.7
Net Weight:	0.98 kg		
IP Class (IEC60529-1):	20		

Annex 1


Description:	Mechanical Drawing
Document Number:	1019136

Marking

Annex 2


Description:	Product Label
Document Number:	1019235

Annex 1

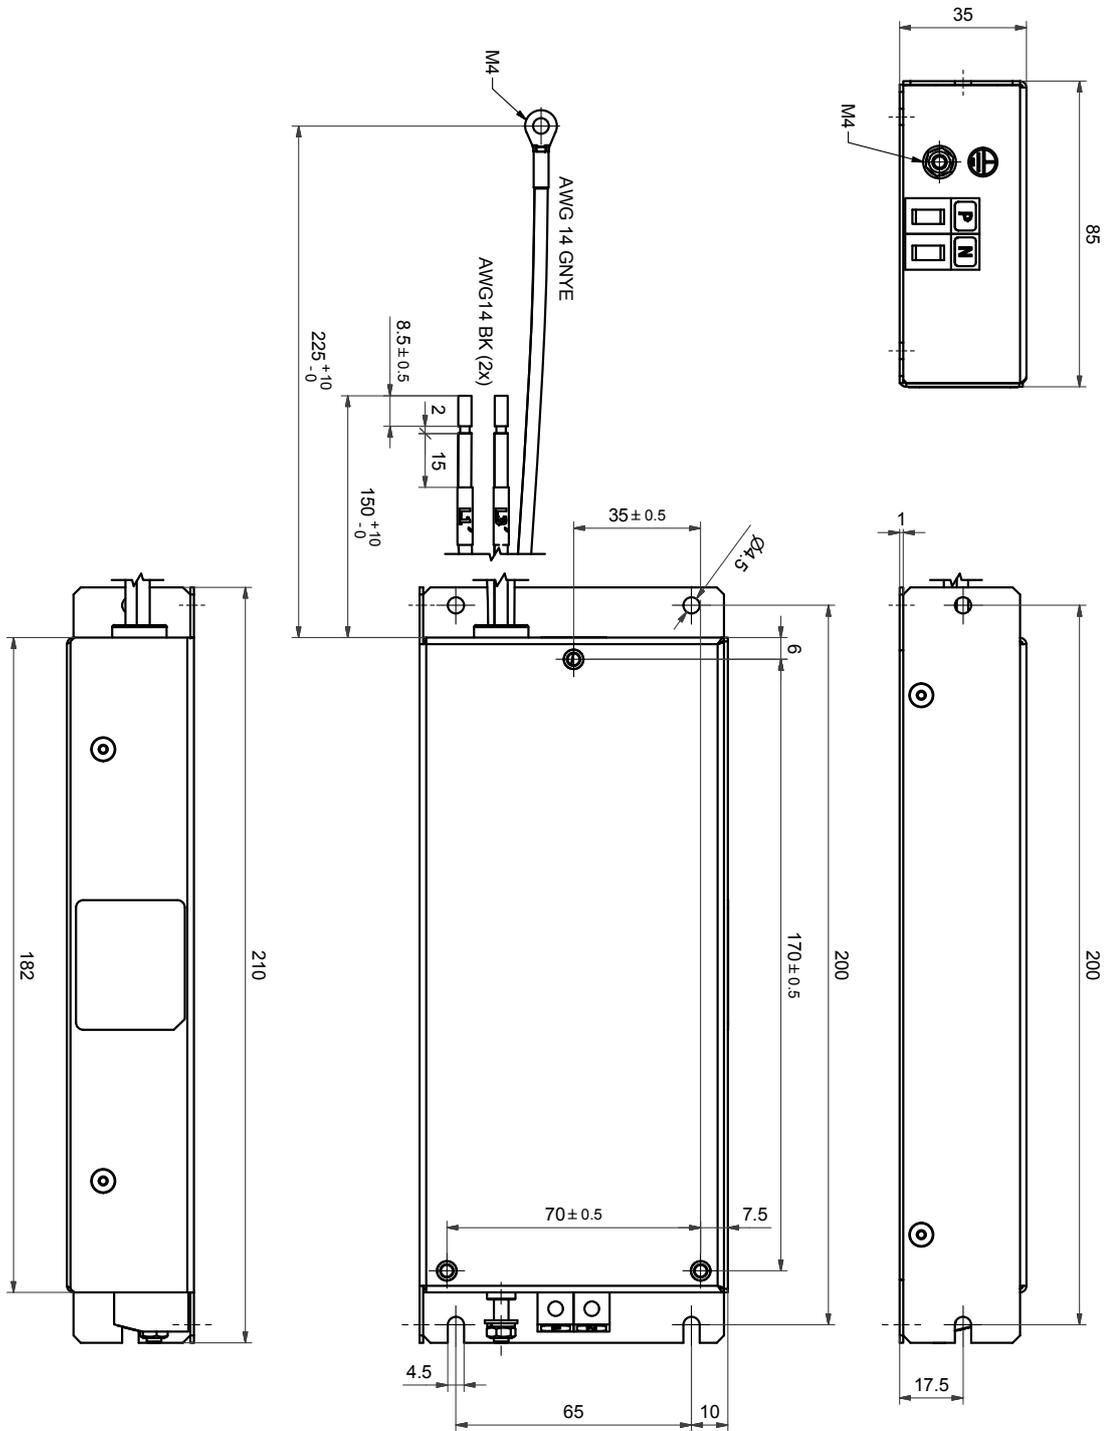

For dimensions [mm] without tolerances:
ISO 2768-m/EN 2768-m applies
109156 A

Annex 2

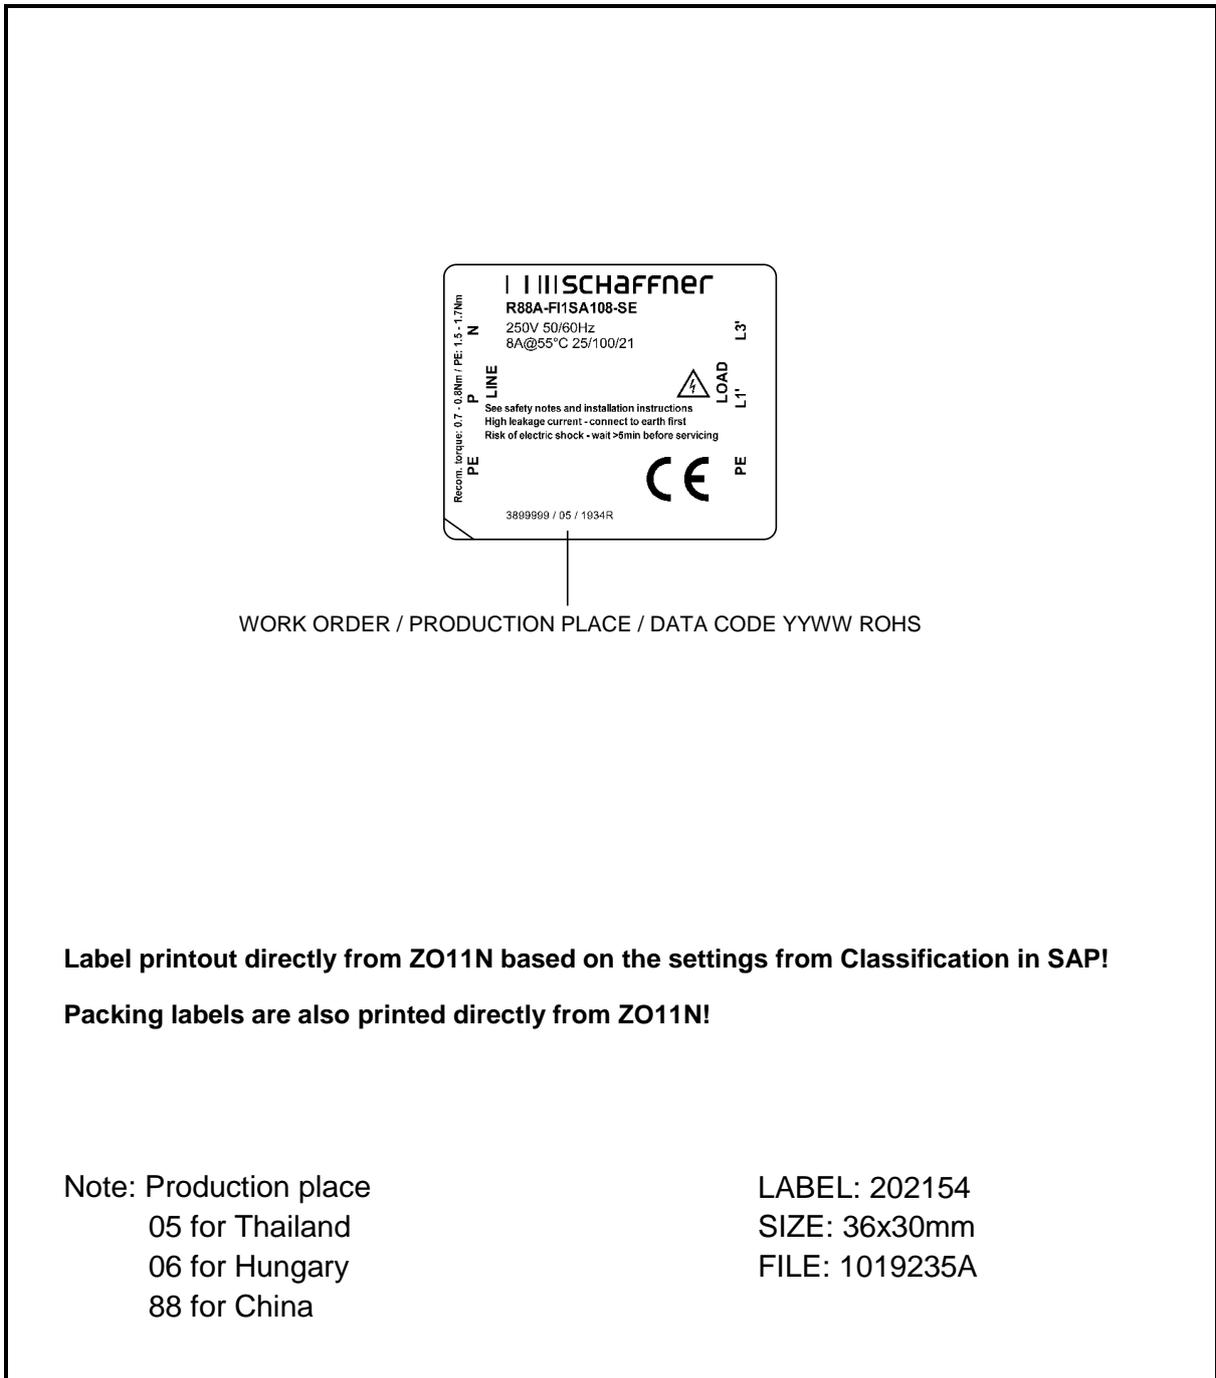

WORK ORDER / PRODUCTION PLACE / DATA CODE YYWW ROHS

Label printout directly from ZO11N based on the settings from Classification in SAP!

Packing labels are also printed directly from ZO11N!

Note: Production place
05 for Thailand
06 for Hungary
88 for China

LABEL: 202154
SIZE: 36x30mm
FILE: 1019235A

			no scale	A4	created	20.08.2019	LUTLNI
A	Add CE	26.08.2019			checked	20.08.2019	LUTLUR
A2	Add CE	20.08.2019	scale	format	released	26.08.2019	LUTLUR
A1		04.06.2019					
A0		22.05.2019					
rev.	change no. / change description	date	LABEL				
			doc. description				
			821119	FS41756-8-07			
			mat. number	project			
We reserve all rights in this document and in the information contained therein. Passing on and/or copying of this document, use and/or communication of its content is not permitted without authorization of Schaffner.			LAB	1019235	A	1 / 1	
Template: SPC 159332 / A			www.schaffner.com	doc. type	doc. number	doc. rev.	page

Disclaimer

1. Product suitability for a given application must ultimately be determined by the user (the party that is putting the product into operation) on a case by case basis. Product functionality and suitability must be determined with proper verification within the final application. Neither Schaffner nor its subsidiaries will assume liability for any consequential downtimes or damages resulting from use of products outside their specifications or due to incomplete verification in application.
2. Do not attempt to install, operate, maintain or inspect any product until you have read and understood the related safety notes and installation guidelines delivered with the product. If not available, general safety and installation notes are available on Schaffner Website: www.schaffner.com.
Non-qualified persons are not allowed to install or maintain Schaffner products!
3. The user is responsible to observe compliance with all local installation and electrical regulations.
4. All products must have their safety earth connected using properly dimensioned connectors. It is recommended to avoid chaining safety earth of multiple equipment together.
5. Warnings, cautions and notes as displayed on the product label must be observed at all times.
6. Overcurrent or overvoltage applied to products or resulting from an improper setup (i.e. resonances) may cause substantial damages, represent a fire hazards and lead to body injury or death.
7. Unless specifically indicated in datasheet, products do not contain any protection components. Suitable overcurrent and overvoltage protection circuits must be placed upstream of the product to avoid any consequential damage in case of any system malfunction.
8. Products with capacitive elements can have significant amount of stored energy. If misused or mishandled it could lead to body harm, damage and eventually fire hazard.
9. Products have limited lifetime and are subject to ageing effects heavily depending on operating conditions and environment. Schaffner recommends to regularly check any inbuilt capacitance to ensure constant performance and considering replacement after 12 years from initial commissioning unless otherwise indicated. Even when properly operated as in specifications, it is not possible to rule out single malfunctioning or failures of components happening before the usual lifetime.
User is responsible to evaluate the environment in the application and eventually perform preventive maintenance before the above recommendation. User shall also evaluate risk of possible failures and implement proper containment actions to avoid damage or injury.
10. Schaffner reserves the right to change raw materials used in this product during its life cycle on the companys own discretion, mainly for the purpose of managing and maintaining a capable international supplier base and for ensuring prompt product availability at all times. All changes having no impact on form, fit, function and technical specifications according to company internal evaluation will be carried out without notification.
Stricter change management process can be implemented on request.