


SPECIFICATIONS

[General Specifications]

Product Name	Electric alarm		
Model	BM－202H	BM－210H	BM－220H
Rated Voltage	24V AC/DC	100V AC	220V AC
Operating Voltage Range	Rated Voltage ±10%		
Rated Power Consumption	0. 4W	2. 5W	3. 5W
Operating Ambient Temperature	－10℃ to +60℃		
Operating Ambient Humidity	Less than 85% (No condensation)		
Mounting Location	INDOOR USE ONLY		
Mounting Direction	UPRIGHT ONLY		
Protection Rating	IP30		
Vibration Resistance	19. 6 m／s ²		
Insulation Resistance	DC 500V more than1MΩ (Between the power wire and the mounting ring for 1 minute not insulation)		
Sound Pressure Level	85 dB (at 1 m)	90 dB/m (at 1 m)	
Sound	CH1 : Rapid(Hi-Lo) CH2 : Stutter (Rapid intermittene horn)		
CH Priority	1ch > 2ch		
Transduser	Piezo electric speaker		
Withstand Voltage	Between the power wire and the mounting ring.		
	AC 500V 1 minute	AC 1500V 1 minute	
Continuous Operating Time	500 h		
Mounting Board Tickness	7 mm or less		
Mounting Hole Dimension	φ 30. 5 mm		
Mass(Tolerance ±10%)	100 g		
Conformity Standards	EMC Directive (EN 55011, EN 61000-6-2) RoHS Directive (EN 50581)		
Remarks	Conforms to the CE requirements		

Wiring

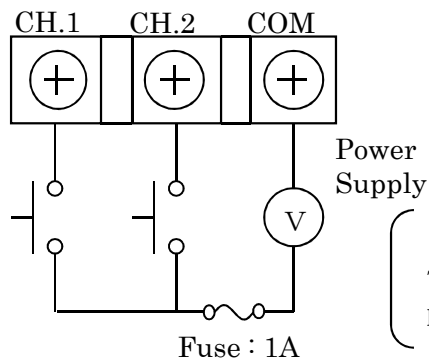

※ BM202H is AC/DC type.
Therefore, power supply's polarity isn't mentioned.

